

File No.	File version	confidential

## M240 Series Cellular IP MODEM TECHNICAL SPECIFICATION




### General

M240 Series Cellular IP MODEM is a kind of cellular terminal device that provides data transfer function by public cellular network.

It adopts high-powered industrial 32 bits CPU and embedded real time operating system. It supports RS232 and RS485 (or RS422) port that can conveniently and transparently connect one device to a cellular network, allowing you to connect to your existing serial devices with only basic configuration. It has low power consumption states in which the power consumption could be lower than 1mA@12VDC. It has compatible digital I/O channel, ADC, input pulse counter and pulse wave output function.

It has been widely used on M2M fields, such as intelligent transportation, smart grid, industrial automation, telemetry, finance, POS, water supply, environment protection, post, weather, and so on.

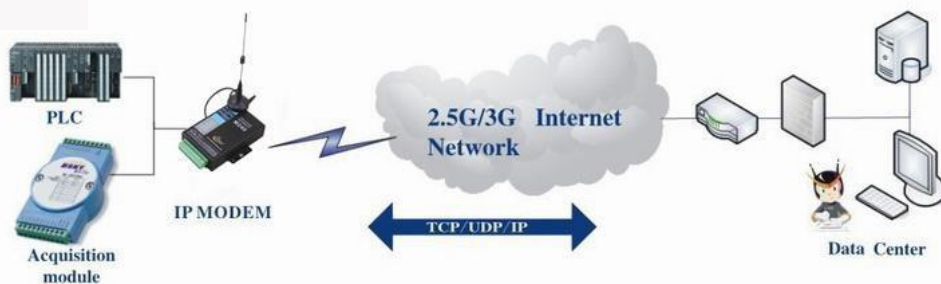

### Product Feature

#### Design for Industrial Application

- ◆ High-powered industrial cellular module
- ◆ High-powered industrial 32 bits CPU
- ◆ Low power consumption design, support multi-sleep and trigger modes to reduce the power dissipation farthest
- ◆ Embedded Real Time Clock(RTC) circuit which can realize timing online/offline function
- ◆ Housing: iron, providing IP30 protection
- ◆ Power range: DC 5~35V

#### Stability and Reliability

- ◆ Support hardware and software WDT
- ◆ Support auto recovery mechanism, including online detect, auto redial when offline to make it always online

- ◆ RS232/RS485/RS422 ports:15KV ESD protection
- ◆ SIM/UIM port: 15KV ESD protection
- ◆ Power port: reverse-voltage and overvoltage protection
- ◆ Antenna port: lightning protection(optional)

#### Standard and Convenience

- ◆ Adopt terminal block interface, convenient for industrial application
- ◆ Support standard RS232/RS485 ports that can connect to serial devices directly
- ◆ TTL logic level RS232 interface can be customized

- ◆ Support intellectual mode, enter into communication state automatically when powered
- ◆ Provide management software for remote management
- ◆ Support several work modes
- ◆ Convenient configuration and maintenance interface

**High-performance**

- ◆ Support TCP server and support multi TCP client connection(optional)
- ◆ Support double data centers, one main and another backup

- ◆ Supply 5 I/O channels, compatible 2 pulse wave output channels, 2 analog inputs and one pulse input counters.
- ◆ Support multi data centers and it can support 5 data centers at the same time
- ◆ Support multi online trigger ways, including SMS, ring and data. Support link disconnection when timeout
- ◆ Support dynamic domain name(DDNS) and IP access to data center
- ◆ Design with standard TCP/IP protocol stack  
Support APN/VPDN

**Product Specification** -----

**Cellular Specification**


Item	Content
Cellular Module	Industrial cellular module
Standard and Band	LTE FDD: B1/B2/B3/B4/B5/B7/B8/B20 (2100/1900/1800/1700/850/2600/900/800MHz) FDD: B2/B4/B5/B13/B17/B25/B26 (Optional), B1/B2/B3 /B5/B7/B8/B20/B28 (Optional) LTE TDD: B38/B39/B40/B41 HSPA+/HSUPA/HSDPA/WCDMA/UMTS 2100/1900/900/850MHz EDGE/GPRS/GSM 1900/1800/900/850MHz
Bandwidth	LTE(DL:150Mbps,UL:50Mbps) HSPA+: 21Mbps(Download speed) 5.76Mbps(Upload speed) HSUPA:5.76Mbps(Upload speed) HSDPA:7.2Mbps(Download speed) UMTS:384Kbps (DL/UL) CDMA2000 1X EVDO: 3.1Mbps(DL)/1.8Mbps(UL) EDGE: 236.8Kbps(DL/UL) GPRS: 85.6Kbps
TX power	<24dBm
RX sensitivity	<-107dBm

**Hardware System**

Item	Content
CPU	Industrial 32 bits CPU
FLASH	512KB (Extendable)
SRAM	256KB(Extendable)

**Interface Type**

Item	Content
Serial	1 RS232 port and 1 RS485(orRS422) port, 15KV ESD protection Data bits: 5, 6, 7, 8 Stop bits: 1, 1.5, 2 Parity: none, even, odd, space, mark Baud rate: 110~230400 bps
Indicator	"Power", "ACT", "Online"
Antenna	Standard SMA female interface, 50 ohm, lightning protection(optional)
SIM/UIM	Standard 3V/1.8V user card interface, 15KV ESD protection
Power	Terminal block interface, reverse-voltage and overvoltage protection

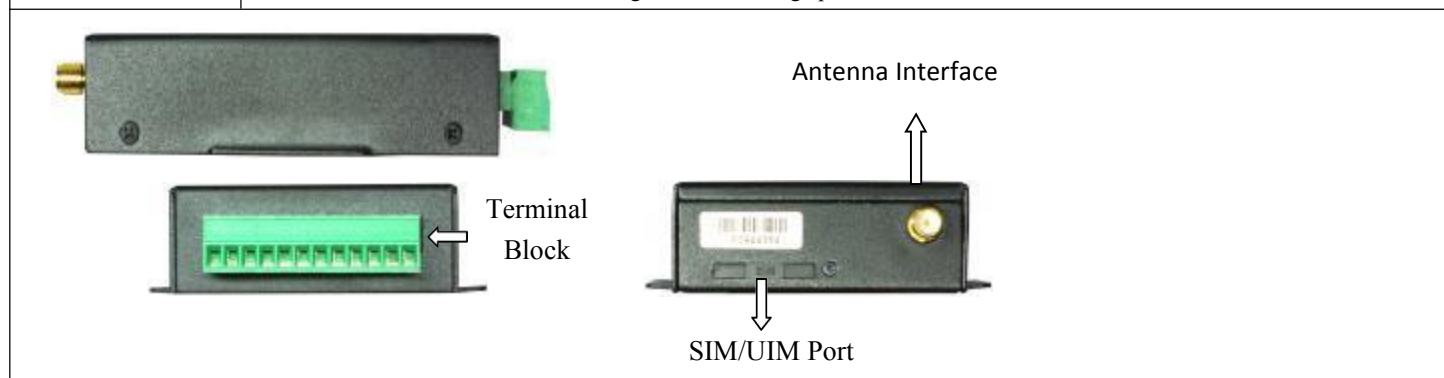

**Power Input**

Item	Content
Standard Power	DC 12V/0.5A
Power Range	DC 5~35V

**Power Consumption**

Working States	Power Consumption
Communication	50-80mA@12VDC; 115-150mA@5VDC
Standby	20mA@12VDC; 35mA@5VDC
Sleep	8mA@12VDC; 18mA@5VDC
Timing Power Off	0.6mA@12VDC; 1mA@5VDC

**Physical Characteristics**

Item	Content
Housing	Iron, providing IP30 protection
Dimensions	91x58.5x22 mm
Weight	205g

**Environmental Limits**

## M240 Series Cellular IP MODEM Technical Specification

Item	Content
Operating Temperature	-25~+65°C (-13~+149°F)
Extended Operating Temperature	-35~+75°C (-31~+167°F)
Storage Temperature	-40~+85°C (-40~+185°F)
Operating Humidity	95% (unfreezing)

### Selection and Ordering Data

M240 Series Cellular Modem 1 x RS232/RS485, 5 x I/O

Model No.	Description
M240-L	4g FDD TDD modem
M240-H	3G HSPA+/HSUPA/WCDMA/UMTS Modem
M240-EV	CDMA2000 EVDO Modem
M240-E	EDGE Modem
M240-G	GSM/GPRS Modem