




# YF336 Series Industrial 4G LTE Router

## *SPECIFICATION*

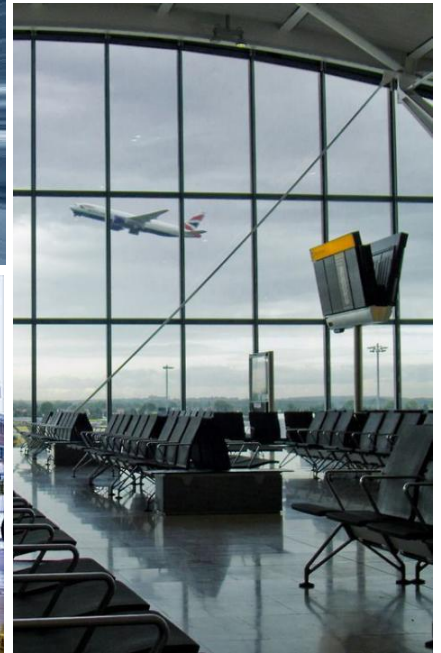

YF336 Industrial Router is an IoT wireless communication router. It is using the public cellular network GPRS/CDMA/WCDMA/EVDO/LTE to provide long distance, wireless and large data transmission function for users.

The product uses the high-performance industrial-grade CPU and wireless module, with the embedded real-time operating system as the software support platform. It provides 3 RS232 and 1 RS485, 1 Ethernet LAN, 1 Ethernet WAN and a WIFI, can be connected to the serial device, Ethernet devices and WIFI devices at the same time, achieve data pass-through function.

YF336 has been widely used in the M2M industry of the IoT industrial chain, such as smart grid, intelligent transportation, smart home, finance, mobile POS terminals, supply chain automation, industrial automation, intelligent building, fire protection, public safety, environmental protection, meteorology, digital medical, telemetry, agriculture, forestry, water, coal, petrochemical and other related fields.

## HIGHLIGHTS

### INDUSTRIAL-GRADE DESIGN

- High-performance industrial-grade CPU
- High-performance industrial-grade wireless communication module
- Metal casing, IP30 protection level, suitable for most industrial control applications.
- Wide range power input (DC 5~36V)

### STABLE & RELIABLE

- WDT protection, ensure system stability
- Multiple protection mechanism to ensure system stability, always keeping online
- Ethernet interface with built-in 15KV ESD
- RS232/RS485 with built-in 15KV ESD
- SIM/UIM card slot with built-in 15KV ESD
- Power interface with built-in phase-reversal and over-voltage protection
- Antenna interface with lightning protection (optional)

### STANDARD INTERFACE & EASY-TO-USE

- Standard RS232/RS485, ethernet and WIFI interface, can be connected to the serial device, ethernet devices and WIFI devices
- Standard wired WAN interface (support standard PPPOE protocol)
- Intelligent data terminal, automatically enter transmission status after power-on
- Powerful central management software for easy device management (optional)
- Easy to use and flexible, has multiple working modes
- Convenient system configuration and maintenance interface (including local and remote WEB or CLI access)

## POWERFUL FUNCTIONS

- Support dual-link intelligent switching function between primary card and backup card (dual-SIM version)
- Support various WAN connection type, including static IP, DHCP, PPPOE, 2.5G/3G/4G
- Support LTE and wired WAN dual-link intelligent switching backup function (optional)
- Support VPN server/client (PPTP, L2TP, IPSEC, OPENVPN, GRE) (VPN version only)
- Support remote management, SYSLOG, SNMP, TELNET, SSHD, HTTPS, etc.
- Support upgrade software locally and remotely
- Support NTP
- Support various DDNS
- Support MAC address clone, PPPoE server
- Support 802.11 b / g / n WIFI network, support WIFI AP, AP Client, Bridge and various working mode (optional)
- WIFI support variety types of encryption such as WEP, WPA and WPA2. Support MAC address filtering.
- Support various online/offline trigger modes, including SMS, phone ringing, serial data, network data to trigger.
- Support APN/VPDN
- Support multi-way DHCP server and DHCP client, DHCP bound with MAC address, DDNS, firewall, NAT, DMZ, QoS, traffic statistics, real-time transfer rate monitoring
- Support various network protocols including TCP/IP, UDP, FTP (optional), HTTP, etc.
- Support SPI firewall, VPN traversal, access control, URL filtering, etc.

## SPECIFICATIONS

### Cellular Specification

Item	Content
Standard & Band	Support Full-NetCom: LTE FDD, LTE TDD, EVDO, WCDMA, TD-SCDMA, CDMA1X, GPRS/EDGE
Frequency	LTE FDD: B1/B2/B3/B5/B7/B8/B20 (2100/1900/1800/850/2600/900/800MHz) FDD: B1/B2/B3/B4/B5/B7/B8/B28 (Optional) B2/B4/B12 (Optional) LTE TDD: B38/B39/B40/B41 HSPA+/HSUPA/HSDPA/WCDMA/UMTS 2100/1900/900/850MHz EDGE/GPRS/GSM 1900/1800/900/850MHz
Bandwidth	FDD-LTE: Downstream rate 150Mbps, uplink rate 50Mbps TD-LTE: Downstream rate 130Mbps, uplink rate 35Mbps DC-HSPA+: Downstream rate 42Mbps, uplink rate 5.76 Mbps HSPA+: Downstream rate 21Mbps, uplink rate 5.76 Mbps UMTS: 384Kbps
Transmit Power	<23dBm
Sensitivity	<-97dBm


### WIFI Specification

Item	Content
Standard & Band	IEEE802.11b/g/n
Bandwidth	IEEE802.11b/g: 54Mbps (Maximum)
Security	IEEE802.11n: 144Mbps (Maximum)
Transmit Power	Support WEP, WPA, WPA2 encrypt methods, optional WPS function
Sensitivity	15±2dBm

### Hardware System

Item	Content
CPU	Industrial-grade CPU
FLASH	16MB (optional for 64MB)
DDR2	128MB (optional for 256MB)

Interface	
Item	Content
<b>WAN Interface</b>	1 x 10/100M RJ45 ethernet port, adaptive MDI/MDIX, built-in 15KV ESD (can be used as a LAN)
<b>LAN Interface</b>	1 x 10/100M RJ45 ethernet port, adaptive MDI/MDIX, built-in 15KV ESD
<b>Serial Port</b>	3 x RS232, 1 x 485 serial interface with built-in 15KV ESD Data bits:5, 6, 7, 8 bits Stop bits:1, 1.5 (optional), 2 bits Error detection: none, even parity, odd parity, SPACE (optional) and MARK (optional)
<b>LED Indicators</b>	“PWR”, “SYS”, “LAN”, “WAN”, “NET”, Signal Indicator
<b>Antenna Interface</b>	Cellular: Standard SMA female antenna interface, characteristic impedance: 50 Ω
<b>SIM/UIM Slot</b>	WIFI: Standard SMA male antenna interface, characteristic impedance: 50 Ω
<b>Power Interface</b>	Standard SIM card slot, support 1.8V/3V SIM/UIM card, built-in 15KV ESD, support dual-SIM card option
<b>Reset Button</b>	Standard 3.5mm terminal block interface, with built-in phase-reversal and over-voltage protection

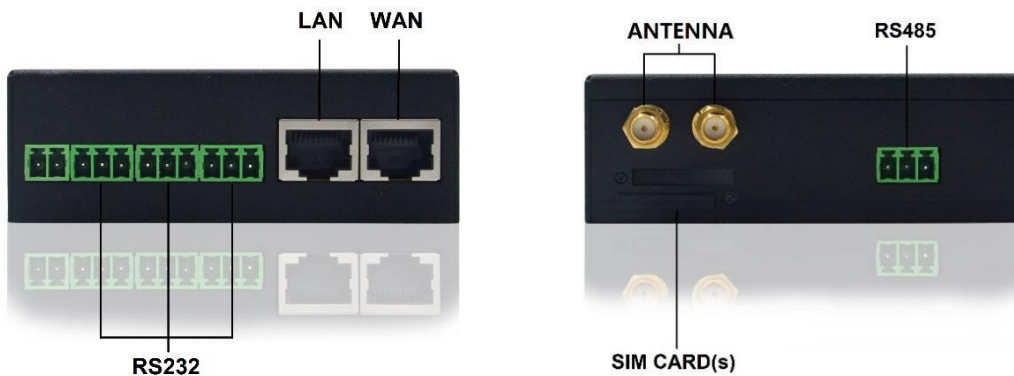

Power	
Item	Content
Input Voltage	DC 12V/1.5A
Accepted Range	DC 5~36V
Power Consumption	
Work Mode	Consumption
Standby	95~135mA@12VDC
Communicating	165~220mA@12VDC
Physical Properties	
Item	Content
Casing	Metal casing, IP30 protection level
Dimensions	126mm x 89mm x 30mm (excluding antennas and mountings)
Weight	320g
Others	
Item	Content
Operation Temperature	-35~+75°C
Storage Temperature	-40~+85°C
Relative Humidity	95% (non-condensing)

## ORDERING INFORMATION

Model	Description	WAN	LAN	Cellular Antenna	WIFI Antenna	SIM/ UIM
YF336-L	LTE WIFI Router	1	1	1	1	1
YF336-L-SIM2	LTE WIFI Router	1	1	1	1	2