



Overview

HUIJUE not only produce outdoor cabinets, but also provide outdoor cabinet solutions that integrate telecom equipment, power supply systems, environmental monitor systems, cooling systems, power supply and lightning protection systems, etc.

Applied to various outdoor scenes such as roofs, street, mountains, railways, and various other complex outdoor environments.

Operation Environment

- Working Temperature: -20 ~ +60°C
- Storage Temperature: -40 ~ +65°C
- Working relative humidity: no more than 80% (at +30°C)
- Storage relative humidity: $\leq 90\% \sim 96\%$ (40°C $\pm 2^\circ\text{C}$)
- Atmospheric pressure: 70kPa ~ 106kPa.

Features

- HJ-OTC-F Series outdoor cabinet suitable for a variety of outdoor environments.
- Waterproof, Anti-corrosion, Durable
- IP degree: IP55, IP65
- Variety material optional: Galvanized sheet, Stainless Steel, Aluminum
- Variety cooling options to choose, Fans, Air condition, Heat exchange
- Floor mounting, wall mounting, pole mounting.
- Accept customized product.
- Various sensors, power distribution box, monitor, battery, etc, Optional.



www.hj-network.com

Headquarter :No. 333 Fengcun Road, Fengxian District, Shanghai, China
Factory Address :No. 26, Heshun Middle Road, Hai'an, Nantong, Jiangsu Province, China



Outdoor cabinet

Floor mounting outdoor telecom cabinet HJ-OTC-FF Series



Slope roof



Battery bearing rack



Air filter



Bottom lifting holes



Fans



www.hj-network.com


Headquarter :No. 333 Fengcun Road, Fengxian District, Shanghai, China
Factory Address :No. 26, Heshun Middle Road, Hai'an, Nantong, Jiangsu Province, China



Data sheet of model HJ-OTC-FF


S/N	HJ-OTC-FF Series
Certification	ISO,CE, RoHS
Structure	Sandwich structure
Cabins	Single cabin
Material	Foam sandwich panel
Doors	Front door
Thickness	Main material adopt 45mm thickness Foam sandwich panel(outer and internal 0.5MM thickness color steel panel,middle 44mm thickness EPS foam),Aluminum alloy edging
Dimension	Outer size 2034*900*900mm(include 150mm height plinth), Internal size 1800*800*800mm.
Cooling method	4 pcs DC24V fans
Surface treatment	Painting,plasma electrostatic painting,hot galvanized, powder coating,polishing,brushing,etc.
Mounting method	Floor mounted
Optional Accessories	Sensors:1*Door alarm Others: 2*battery bearing rack,1*light.
IP Degree	IP55
Color	RAL7035
Package	Export standard plywood box + pallet package.

Drawings

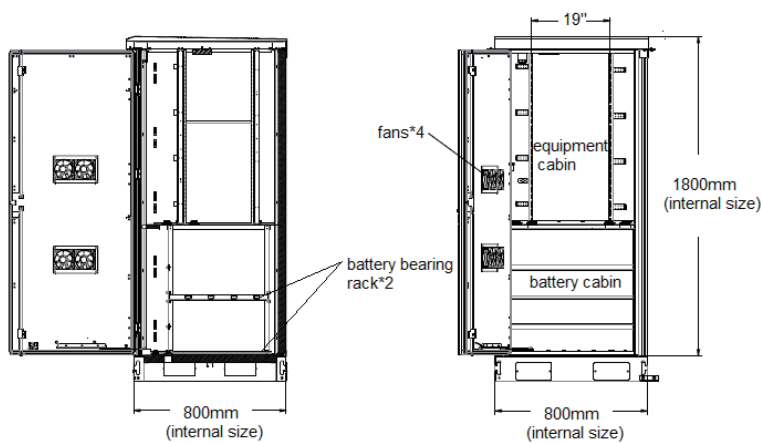

Description:

1. Dimension : outer size 2034*900*900mm(include 150mm height plinth),internal size 1800*800*900mm.
2. Protection Degree: IP65.
3. Material: main material adopt 45mm thickness Foam sandwich panel(outer and internal 0.5MM thickness color steel panel,middle 44mm thickness EPS foam),Aluminum alloy edging
4. Equipped with 4 pcs DC24v fans,4 pcs 19" standard mounting rails,2 pcs battery bearing rack.
5. Front and rear door ,removable.
6. Double layer structure,19" rails
7. Color: Beige(RAL7035) or customer decides.
8. Package:Export standard carton box+wood pallet packing.



www.hj-network.com

Headquarter :No. 333 Fengcun Road, Fengxian District, Shanghai, China
Factory Address :No. 26, Heshun Middle Road, Hai'an, Nantong, Jiangsu Province, China



HJ-OTC-F Series Order Guide

Please fill in your detail requirement.

S/N	Your requirement	Optional
Structure		ISO,CE, RoHS
Cabins		<input type="checkbox"/> Single layer structure; <input type="checkbox"/> Double layer insulation structure(optional).
Material		<input type="checkbox"/> Single cabin <input type="checkbox"/> Two cabins.
Doors		<input type="checkbox"/> Galvanized sheet; <input type="checkbox"/> 304/316 Stainless Steel(optional); <input type="checkbox"/> Aluminum(optional).
Thickness		<input type="checkbox"/> Front door; <input type="checkbox"/> Front and rear door(optional).
Dimension		<input type="checkbox"/> 19"rails:2.0mm,outer panel adopt 1.5mm,internal panel adopt 1.0mm. <input type="checkbox"/> Accept Other option according to customer.
Cooling method		<input type="checkbox"/> Height:4U-45U Width:500,600mm,800mm,etc Depth:400,500,600,800,etc <input type="checkbox"/> Accept Customized size.
Surface treatment		<input type="checkbox"/> 2*Fans; <input type="checkbox"/> 4*Fans; <input type="checkbox"/> Air condition (optional); <input type="checkbox"/> Heat-exchange(optional).
Mounting method		Painting,plasma electrostatic painting,hot galvanized, powder coating,polishing,brushing,etc.
Optional		<input type="checkbox"/> Wall mounted & Floor mounted; <input type="checkbox"/> Pole mounted (optional).
Accessories		<input type="checkbox"/> Sensors:Door alarm,Temperature Sensor,Humidity Sensor,Water Sensor,Smoke alarm,etc. <input type="checkbox"/> Cooling device:Fan,Air condition,Heat exchange. <input type="checkbox"/> Others:Shelves,light,Monitor,PDU,Power supply, Lightning protection,Breakers,Power distribution box,DDF,ODF,Battery,etc.
IP Degree		<input type="checkbox"/> IP55; <input type="checkbox"/> IP65(optional).
Color		<input type="checkbox"/> RAL7035; <input type="checkbox"/> RAL1013,etc. (optional).
Package		<input type="checkbox"/> Export standard carton box+plywood pallet; <input type="checkbox"/> Export standard plywood box package(optional).

*Sample: FOP-S1-S09-1A SM G652D, Simplex 0.9mm,FC/APC,Fiber Optic Pigtail.



www.hj-network.com

